




T8 Replacement Tube

TRUE UNIVERSAL

2'

3'

4'

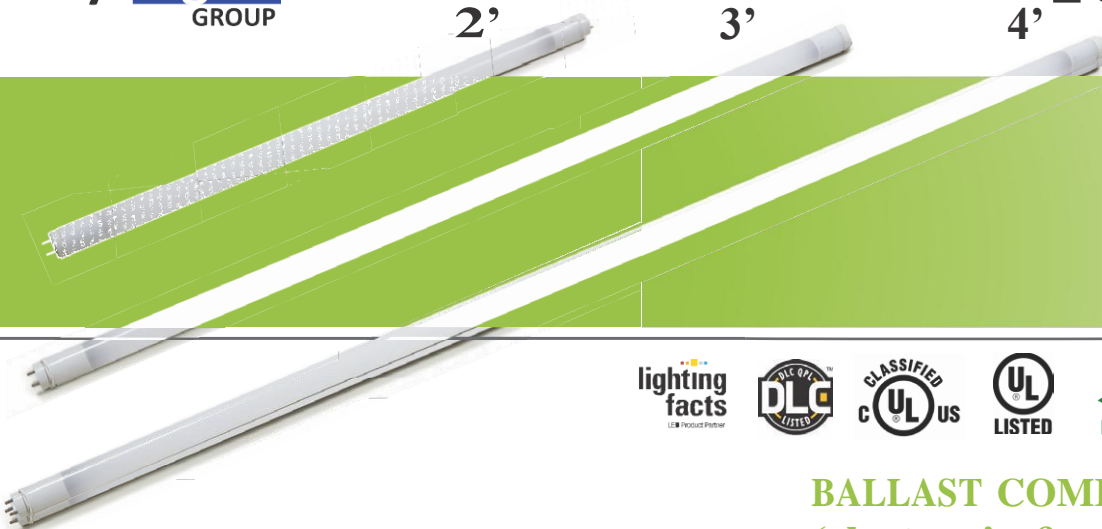


PRODUCT SUMMARY

- 50,000 Hour Life
- Smooth Diffusion
- No Hot Spots/No Dark Spots
- Multi Voltage 120/220/277
- Suitable for Damp Locations
- Wide Beam
- 5 Year Warranty
- Uniform Light Distribution
- Shatterproof
- Contains no Mercury
- Impact Resistant

BALLAST COMPATIBLE (electronic & magnetic)

- Instant Start
- Rapid Start
- Program Start
- Quick Start
- Magnetic
- No Rewiring Required
- 120v-277v
- Low THD <10%
- High Power Factor

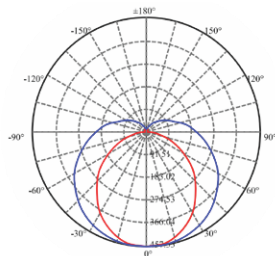

165 degree beam / 285 degree eld

LINE VOLTAGE COMPATIBLE (universal)

- 120v-277v
- Low THD <10%
- High Power Factor

- 120~
- 220~
- 277~
- 3500K
- 4100K
- 4'
- 3'
- 2'
- 165°
- UV
- UV

CATALOG	POWER	CCT (K)	LENGTH	CRI	LUMENS
zT82435123E-X	12W	3500	2'	>80	1300
zT82441123E-X	12W	4100	2'	>80	1300
zT83635153E-X	15W	3500	3'	>80	1600
zT83641153E-X	15W	4100	3'	>80	1600
zT84835183E-X	18W	3500	4'	>80	2000
zT84841183E-X	18W	4100	4'	>80	2000

• -X = Ballast and Line Compatible

• -B = Ballast Only

• -L = Line Only

